

TYPE:

ORDERING CODE:

APPROVAL:


JOB:

CRE2153

DATE:

**SPECIFICATIONS**

Max Overall Dimensions: 1.063" (OH) x 3.150" (H) (27mm x 80mm)  
 Aperture Diameter: 0.984" (25mm)  
 Primary Material: Marine grade Stainless Steel 316L Lens  
 Type: Toughened 6mm glass lens Beam Angle: 17 (min.) – 17 (max.)  
 Fiber Type: Recommended FSPT 12-75  
 Finishes: Stainless Steel Ferrule Requirement: 8mm or 10mm ferrule  
 Mounting: Fixing clamp required, normally supplied by a fountain specialist  
 Notes: IP 68 rated, Exterior and Underwater rated

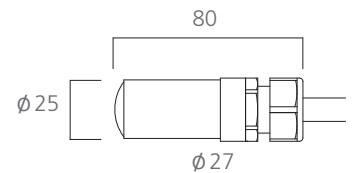

TYPE:

ORDERING CODE:

APPROVAL:

JOB:

DATE:

**SPECIFICATIONS**

TYPE:

ORDERING CODE:

APPROVAL:

JOB:

DATE:

**SPECIFICATIONS**