

TYPE:

ORDERING CODE:

APPROVAL:

JOB:

DF-JELLY-05/065/08/10

DATE:

SPECIFICATIONS

Max Overall Diameter: Available in 5' (1.5m), 6.5' (2m), 8' (2.5m) or 10' (3m) diameter

Fiber Bundle: 400 Fibers PMMA @ 1.0mm

Fiber Tail: Std. 3' long, additional tail length available

Rough-in: 2.362" (60mm) for fiber tail





Port Size: 400 Fibers @ 1.0mm; Port diameter 2.362"

Primary Material, Fixture: Flexible translucent plastic resin over PMMA fiber optic cables. Each fixture is made to order and has a unique organic appearance. Superficial imperfections and globules of air in the resin may occur and do not negatively affect the performance of the fixture.

Primary Material, Tail: Flexible metal sheath around optical fibers

Illuminators: Do not synchronize illuminators; 4 colors recommended over 8 recommended units: 405N, 404N or 601

Mounting: Steel cables attached to the fixture. Gather cables and attach to single steel cable with a hook (supplied by others)

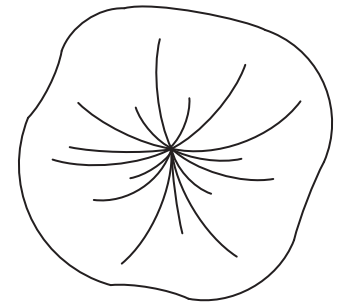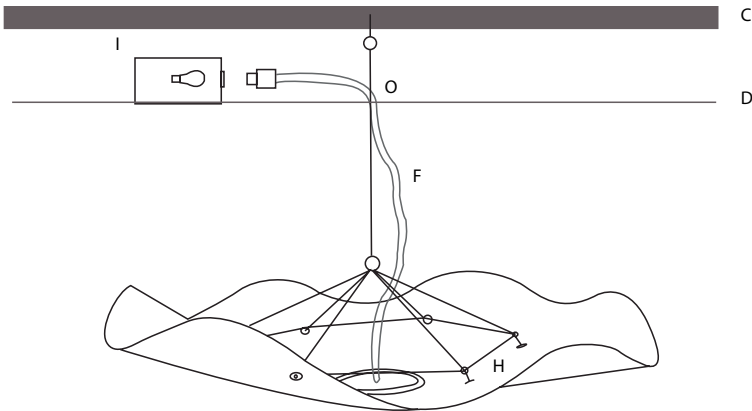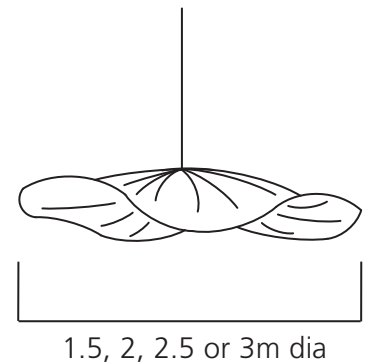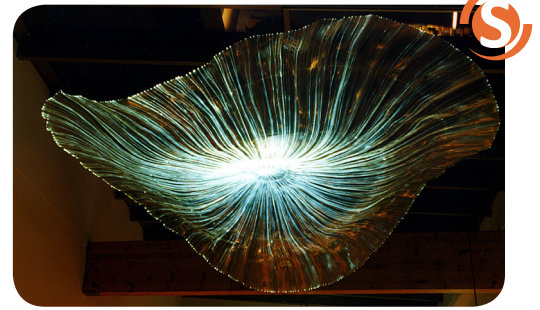

- C: Concrete Ceiling
D: Drop Ceiling
F: Fiber Optic cables in sheath metal
I: Illuminator (always place in horizontal position)
H: Connection S-hook
O: Cut out in ceiling; 2.362" (60mm)

Size Diameter	Weight (lbs.)	Weight (kg)
5ft	23	10
6.5ft	27	12
8ft	45	20
10ft	56	25