

TYPE:

ORDERING CODE:

APPROVAL:

JOB:

DATE:

SPECIFICATIONS


Primary Material Aluminum extrusion
Beam Spread 60°
Fiber type 0.75mm PMMA Fiber
Fiber Tail 10', 20' or 30' Custom lengths available
Finishes Clear or black anodized
Max Exp Rating Indoor or outdoor use. Please specify with order
Linking Soft links available for longer lengths and sharp corners
Mounting Use LB-MB Mounting bracket



Light emits 45 degrees from right-angle side; other aims possible by custom order.

Isometric Key:

B Base Size
L Lit Length (see table)
S Fiber Spacing/Intensity
T Tail Length

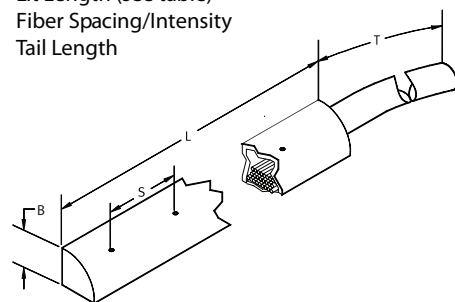

LightBeam Quarter Round

Ordering Guide

Type	Length	Tail	Intensity	Base Size	Exposure	Finish Type	Tail Exit
LBQR	1" to 120"	10' to 30'	01F 1 Fiber / inch 02F 2 Fibers / inch 04F 4 Fibers / inch 05F 5 Fibers / inch 06F 6 Fibers / inch 08F 8 Fibers / inch 10F 10 Fibers / inch 00C Custom	S Standard C Compact	I Indoor O Outdoor W Outdoor wet/sub-mergible	C Clear Anodized B Black Anodized	L Left side R Right side D Dual Tail C Custom

TYPE:

ORDERING CODE:

APPROVAL:

JOB:


DATE:

SPECIFICATIONS


			Standard Base Configuration			Compact Base Configuration		
Intensity	Fibers per Inch	Spacing	Max Lit Length	Fiber-bundle Max # of Fibers	Max Cable Diameter	Max Lit Length	Fiber-bundle Max # of Fibers	Max Cable Diameter
Low	1	1.000"	120"	120	3/4"	120"	168	9/16"
Medium	2	0.500"	120"	240	3/4"	84"	168	9/16"
High	4	0.250"	108"	432	7/8"	42"	168	9/16"
Bright	5	0.200"	96"	480	7/8"	34"	168	9/16"
SuperBright	6	0.166"	80"	480	7/8"	28"	168	9/16"
XtraBright	8	0.125"	60"	480	7/8"	21"	168	9/16"
UltraBright	10	0.100"	48"	480	7/8"	17"	168	9/16"

Many custom configurations are available for our Lightly Expressed Light Bar products. Please consult factory for specifications and pricing

LightBeam Quarter Round



Standard Base



Compact Base

