

TYPE:

ORDERING CODE:


APPROVAL:

JOB:


DATE:

SPECIFICATIONS


Primary Material	Aluminum extrusion
Beam Spread	60° asymmetric (15°, 30° and 35°)
Fiber type	0.75mm PMMA Fiber
Light Intensity:	High: 4 Fibers per inch. Consult factory for other configurations
Fiber Tail	10', 20' or 30' Custom lengths available
Finishes	Clear anodized
Max Exp Rating	Indoor use, not suitable for wet environments
Linking	Soft links available for longer lengths and sharp corners
Mounting	Use LB-MB Mounting bracket

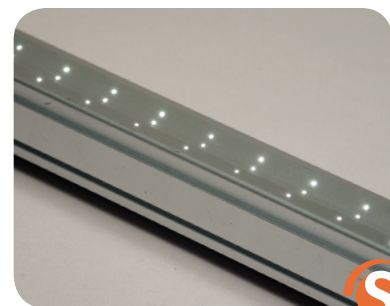

Unique with 3 asymmetric aiming angles of 15°, 30° and 35° allowing for a broader wash of light



Isometric Key:
L Lit Length (see table,
T Tail Length

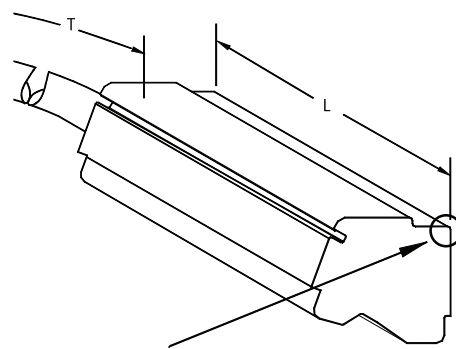

THIS IS THE TOP RIGHT CORNER, USED WHEN DETERMINING THE TAIL EXIT (LEFT TAIL EXIT SHOWN)

TriAxis

Ordering Guide

Type	Length	Tail	Intensity	Base Size	Exposure	Finish Type	Tail Exit
TRX	1" to 120"	10' to 30'	01F Low 02F Medium 04F High 05F Bright 06F SuperBright 08F XtraBright 10F UltraBright 00C Custom	S Standard	I Indoor	C Clear Anodized	L Left side R Right side D Dual Tail C Custom